

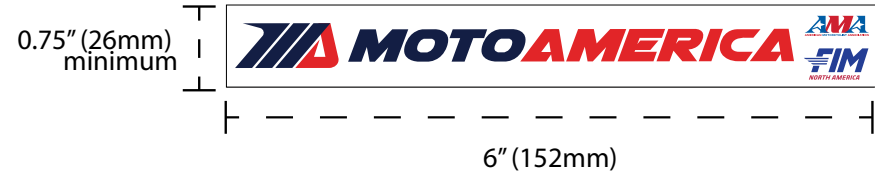


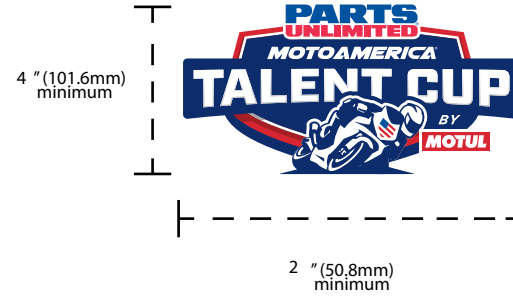


**2025 SEASON**  
**NUMBER AND MOTORCYCLE LOGO**  
**GUIDELINE. COMPETITOR BULLETIN 02-2025**

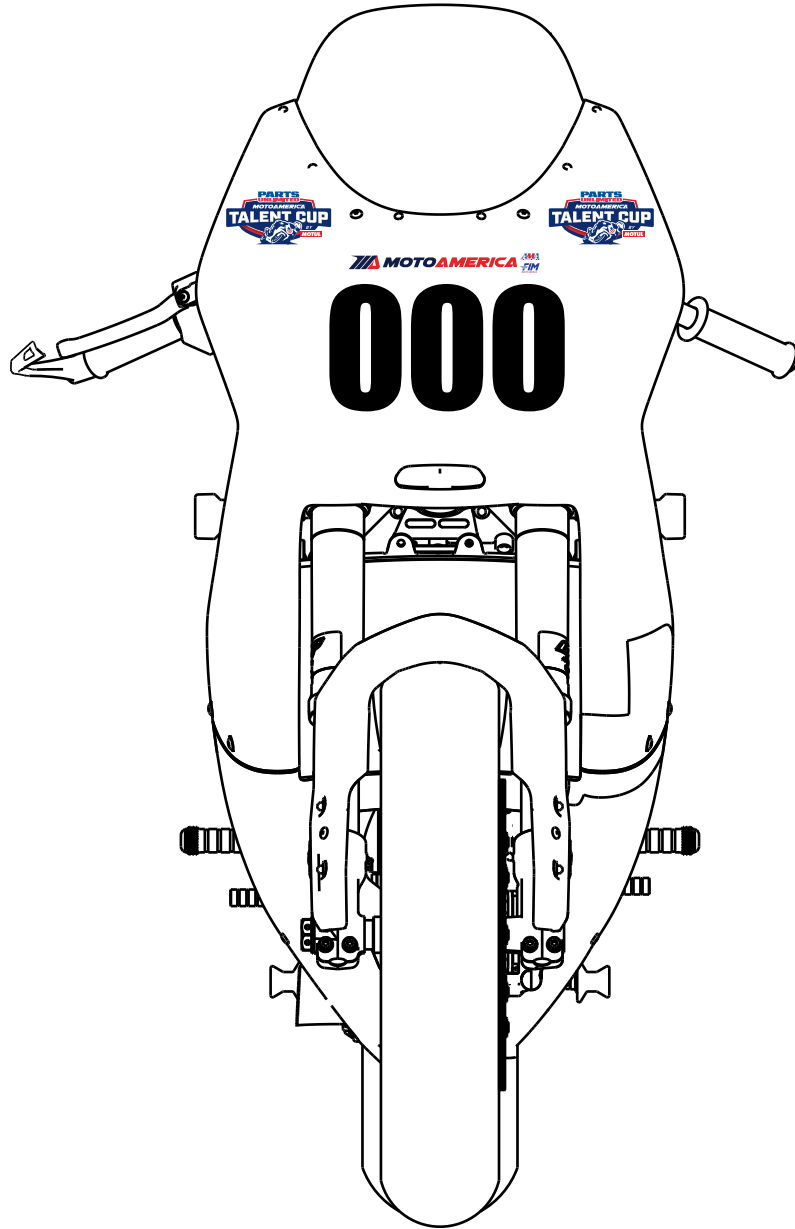


3.1" (80mm)  
minimum

5.5" (140mm)  
minimum

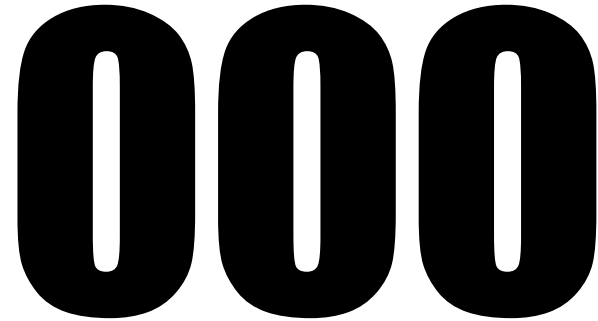

\* minimum stroke is 0.75" (20mm)  
\*\* minimum space between numbers is 0.40" (10mm)

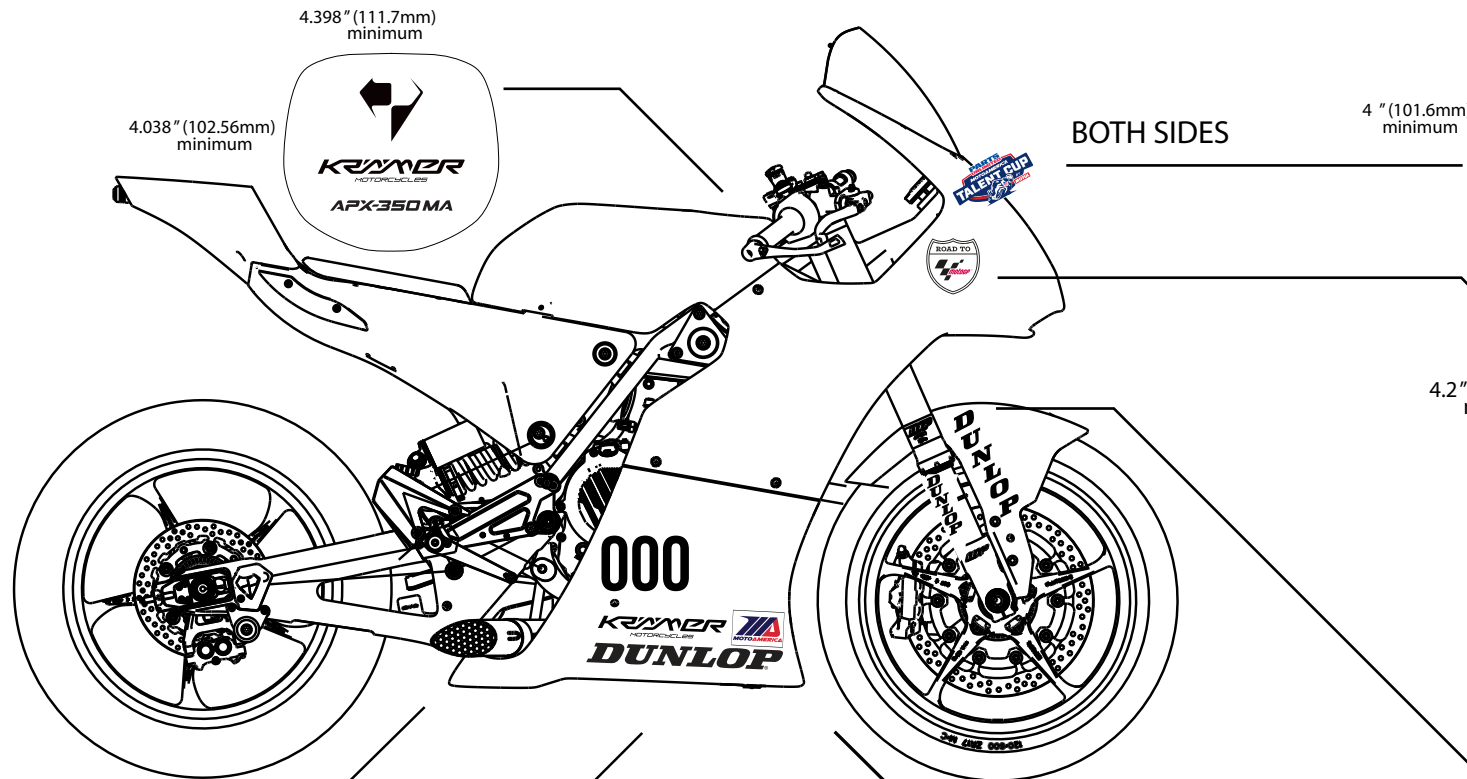

2" (50.8mm) minimum



4.2" (51mm) minimum

4.5" (114mm) minimum

2.75" (70mm) minimum

4.75" (120mm) minimum

**000**

1.75" (44.5mm) minimum

**KRYMOR**  
MOTORCYCLES

10" (254mm)

2" (50.8mm) minimum



3" (76.2mm)

2.5" (63mm) minimum

**DUNLOP**

12" (305mm)

5.5" (140mm) minimum

**DUNLOP**

1.67" (42mm)

\* minimum stroke is 0.75" (20mm)  
\*\* minimum space between numbers is 0.40" (10mm)